
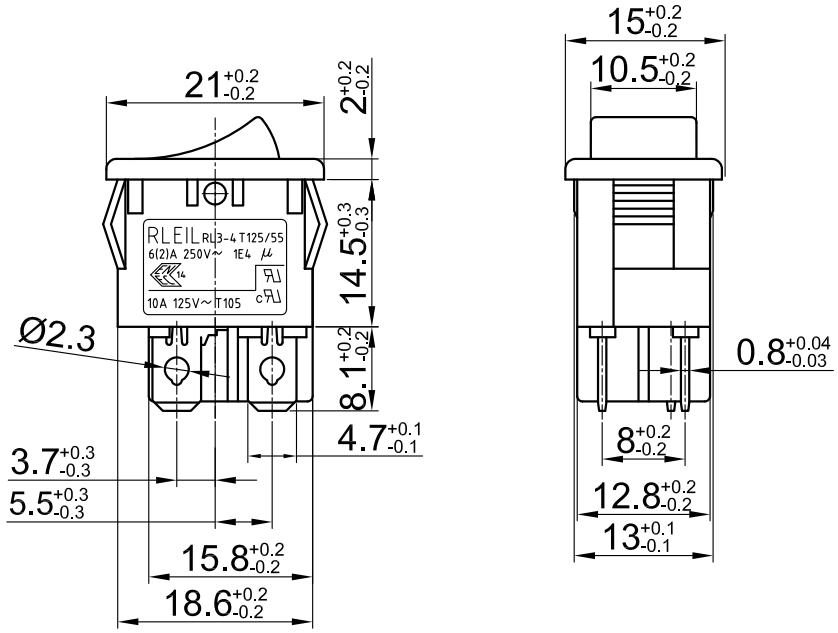





SPECIFICATION

1. RATING:UL C-UL:10A 125VAC
   ENEC :
   6(2)A 250VAC T125/55 1E4
2. CIRCUIT:ON-OFF W/Lamp SPST 3P
3. CONTACT RESISTANCE:30m OHMS Max
4. INSULATION RESISTANCE:DC500V 100M OHMS Min
5. WITHSTAND VOLTAGE:AC 1500V 1 Minute
6. ELECTRICAL LIFE:10000 Cycles at Full Load
7. OPERATION FORCE:800~1200gf
8. OPERATION TEMPERATURE RANGE:-25~+125° C

PANEL HOLE SIZE

Panel thickness	X
0.75-1.25	19.2
1.25-2.0	19.4
2.0-3.0	19.6

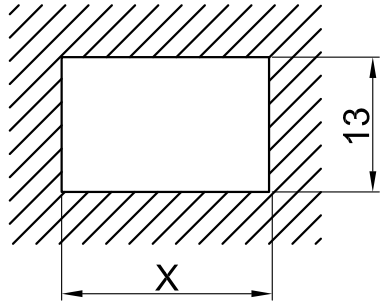

MATERIALS

1. HOUSING:Nylon #66 UL 94V-2
2. ROCKER:PC UL 94HB
3. TERMINAL:Copper Alloy Ag plated
4. CONTACTOR:$AgSnO_2In_2O_3$(10)/Cu

SHALLIN ELECTRONICS CO., LTD.						B1150	
						TITLE: ROCKER SWITCH	SERIES:
设计	签名	年月日	标准化	签名	年月日		FUNCTION: ON-OFF W/Lamp
绘图	符辉	16.12.25				VIEWS TYPE	DRAWING NUMBER
审核	张雪飞						
工艺			批准				