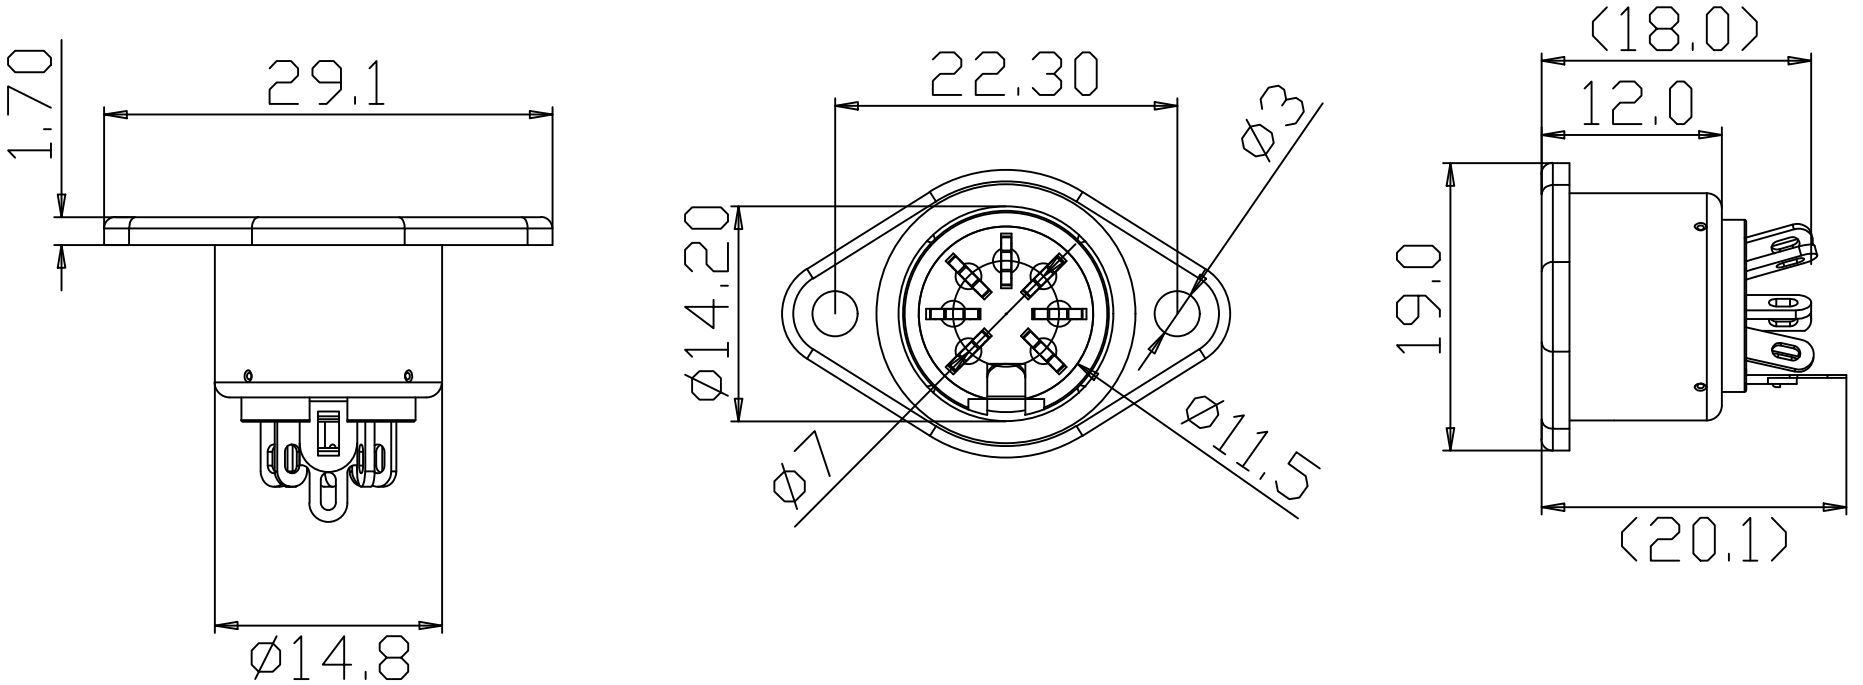


Specifications

rating :

100V AC 1A MAX

contact resistance :


pins-30mΩ MAX; shell-50mΩ MAX

insulation resistance :

MIN 100 MEGΩ @500V DC

voltage withstand :

250V AC R.M.S. for 1 minute



K3710D	K3710E

No.	Description	Material	Treat	Q'ty
4	Shield Spring	BRASS	Nickel Ptd.	1
3	Contact terminals	BRASS	Silver Ptd.	AS TABLE
2	Housing	PBT		1
1	Shell Cover	STEEL	Nickel Ptd.	1

SHALLIN ELECTRONICS CO., LTD.

品名: ITEM :	DIN JACK FOR PANEL		一般公差	SHEET:	單位: unit:	mm	日期: date:	'09/04/01	繪圖: drwn by:	DanielShyr
料號 PART NO.	AS TABLE	圖號 DRW NO. ☒	.X +/-0.3 .XX+/-0.20	1/1	比例: scale:	2 : 1	版本: version:	V. 1.0	核准: aprvld by:	SkyShyr