



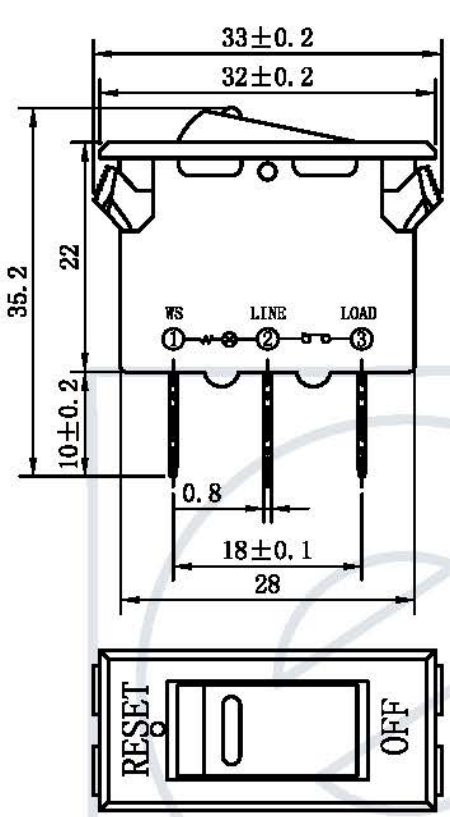

安装面板尺寸
PANEL CUT-OUT

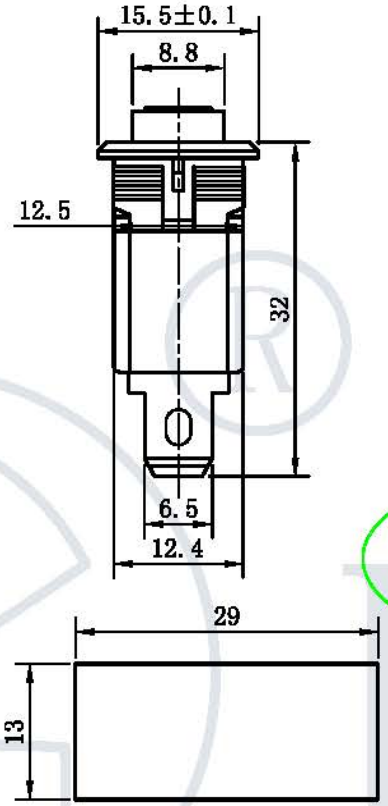


ST-001 Long Pins(长脚)

Specification

1) Rating current: min. 5A, max. 20A
2) Working voltage: min. 12V, max. 250V
3) Double usage of DC and AC
4) Application: household appliance and electrical motor
5) Current: 5A, 10A, 15A,20A
6) Insulated resistance: ⩾100MΩ
7) Dielectric strength: ⩾1500VAC/1min
8) Electrical Life: ⩾10,000 Time

Technique characteristic;the test temperature (20° -25°),the reference curve as followed

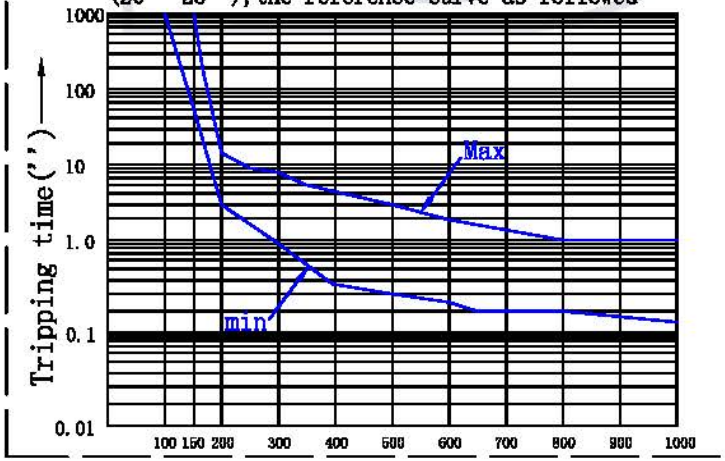

The experiment of short-circuit.ambient temperature:25°

curtent overload rating curtent PCT	Tnipping time
105%	1hour no tnipping
150%	1hour tnipping
200%	7.0-80''
300%	0.8-15''
400%	0.35-5''
500%	0.3-2.8''
600%	0.25-2''
800%	0.2-1''
1000%	0.15-0.8''

版本	标示	更 改 描 述		
产品型号: ST-001			产品料号: ST-001	
产品系列 Rocker switch	制图:		审核:	核准:
图纸比例: 1:1	日期: 2013.11.6		日期: 2013.11.6	日期: 2013.11.6
若没有特别标示，公差依照以下要求: X.=±0.5 .X=±0.30 .X=±0.15 ∠=±2°(单位: mm)				(第一视角法)

乐 清 市 戴 尔 电 子 有 限 公 司
YUEQING DAIER ELECTRON CO.,LTD