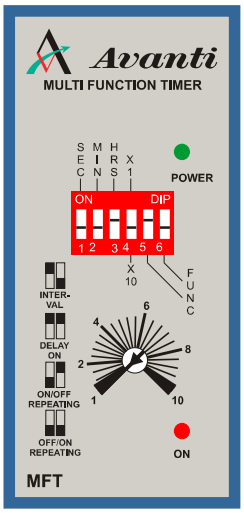

MODEL	**MFT** - Multi-range with Multi-Function.			
				
TIME RANGE DIP Sw Selectable	0.1 - 1 second 0.1 - 1 minute 0.1 - 1 hour	1 - 10 seconds 1 - 10 minutes 1 - 10 hours		
FUNCTION(S) DIP Sw Selectable	**Delay-On**	**Interval**	**Equal-Repeating ON/OFF**	**Equal-Repeating OFF/ON**
DESCRIPTION OF OPERATION	When power is ap-plied the relay remains de-ener-gised. After the pre-set time, the relay energises. Remove power to reset.	When power is ap-plied the relay en-ergises. After the pre-set time, the relay de-energises. Remove power to reset.	When power is ap-plied the relay will switch ON and OFF continuously. The preset time is the same for both cycles. Remove power to reset.	When power is applied the relay will remain OFF, then switch ON and OFF continuously. The preset time is the same for both cycles. Remove power to reset.
CONTROLS AND LABEL DATA				
WIRING DIAGRAM				
VOLTAGE	12V,24V AC/DC 110V,230V,400V AC			
	Click here for the PRICELIST			

All Prices Exclude VAT and are subject to change without prior notice.